

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Honorable Assistant Commissioner
for Patents
Washington, D.C. 20231

I hereby certify that this correspondence is being deposited TODAY with the United States Postal Services as Express Mail-Post Office to Addressee in an envelope addressed to: Assistant Commissioner for Patents, Washington, D.C. 20231.

Robin G. Reeves
Robin G. Reeves

7/16/97
Date

Express Mail Label No. **EM031048215US**

This is a request for filing a ☐ Continuation ☒ Divisional application under 37 C.F.R. 1.60 of pending prior application Serial No. 08/367.399, filed on 30 December 1994, of Kenneth A. Parulski, et al for AN ELECTRONIC CAMERA HAVING A PROCESSOR FOR MAPPING IMAGE PIXEL SIGNALS INTO COLOR DISPLAY PIXELS.

- 1) ☒ Enclosed is a copy of the prior application as originally filed on 30 December 1994 and a declaration verifying it as a true copy.

- 2) ☒ The filing fee is calculated below:

The filing fee has been calculated as shown below:

FOR:	NO. FILED	NO. EXTRA	OTHER THAN A SMALL ENTITY	
			RATE	FEE
BASIC FEE				\$ 770
TOTAL CLAIMS	18 - 20 =	0	x 22 =	\$ 0
INDEPENDENT CLAIMS	5 - 3 =	2	x 80 =	\$ 160
MULTIPLE DEPENDENT CLAIM PRESENTED			+ 260	\$0
			TOTAL	\$ 930

- 3) ☒ The Assistant Commissioner is hereby authorized to charge any filing fees which may be required or credit any overpayment to Deposit Account No. 05-0225.

A duplicate copy of this sheet is enclosed.

- 4) ☒ Cancel Claims **7-18, 22.**

- 5) ☒ Amend the specification by inserting before the first line the sentence: This is a Divisional of application Serial No. 08/367.399, filed 30 December 1994.

- 6) ☐ Transfer the drawings from the prior application to this application and abandon said prior application as of the filing date accorded this application.

A duplicate copy of this sheet is enclosed for filing in the prior application.

- 7) ☒ The power of attorney in the prior application is to Thomas H. Close, Reg. No. 27,428 and David M. Woods, Reg. No. 27,171; both at Eastman Kodak Company, 343 State Street, Rochester, New York 14650-2201.

Please address all written communications to Thomas H. Close, Patent Legal Staff, Eastman Kodak Company, 343 State Street, Rochester, NY 14650-2201.

Please Direct all telephone calls to David M. Woods at (716) 477-5256.

- 8) ☒ A preliminary amendment is enclosed.

DMW/rgr

Telephone: (716) 477-5256
Facsimile: (716) 477-4646

David M. Woods

David M. Woods
Attorney for Applicants
Registration No. 27,171

69998ADMW

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of

Inventor(s):

Kenneth A. Parulski

Timothy J. Tredwell

AN ELECTRONIC CAMERA HAVING
DUAL MODES FOR COMPOSING
AND CAPTURING STILL IMAGES

Group Art Unit: 2604

Examiner: Greening, W.

I hereby certify that this
correspondence is being deposited
today with the United States
Postal Services as Express Mail -
Post Office to Addressee in an
envelope addressed to:
Commissioner of Patents and
Trademarks, Washington, D.C.
20231

Robin G. Reeves

Name: Robin G. Reeves

Date: July 16, 1997

Rule 60 Divisional of 08/367,399

Express Mail Label:
EM031048215US

Serial No. To Be Assigned

Rochester, New York
14650-2201

Filed: 16 July 1997

July 16, 1997

Honorable Commissioner of Patents and Trademarks
Washington, D.C. 20231

Sir:

PRELIMINARY AMENDMENT

In the Claims

Please add claims 26-31, as follows.

26. An electronic camera operable in a still
image mode and in a motion preview mode, the improvement
wherein

the still image mode uses a relatively more
complex digital image processing technique implemented in
software to produce high quality still images, and the
motion preview mode uses a relatively more simple digital

image processing technique implemented in an application specific integrated circuit to produce a preview image of acceptable quality prior to initiation of the still image mode.

27. A method for processing images captured by an electronic camera that is operable in a still image mode and in a motion preview mode, said method comprising the steps of:

processing the images in the still image mode by using a relatively more complex digital image processing technique that produces a larger number of output pixel values than input image pixels to produce high quality still images; and

processing the images in the motion preview mode by using a relatively more simple digital image processing technique that produces a smaller number of output pixel values than input image pixels to produce a preview image of acceptable quality.


28. The method as claimed in claim 27 wherein both modes provide color images composed of color pixels.

29. The method as claimed in claim 28 wherein the step of processing the images in the still mode includes a color filter array interpolation process that produces a larger number of output color pixel values than input color pixels.

30. The method as claimed in claim 28 wherein the step of processing the images in the motion preview mode maps an array of input color image pixels into a smaller array of color display pixels.

31. The method as claimed in claim 27 wherein the step of processing the images in the still mode is implemented in software, and the step of processing the images in the motion preview mode is implemented in an integrated circuit.

Respectfully submitted,

A handwritten signature in cursive script, reading "David M. Woods", is written over a horizontal line.

David M. Woods
Attorney for Applicant(s)
Registration No. 27,171

DMW:RR
DOCKETS\69998A\Prelimam
(716) 477-5256

085094.0137

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Honorable Assistant
Commissioner for Patents
Washington, D.C. 20231

I hereby certify that this correspondence is being deposited TODAY with the United States Postal Services as Express Mail-Post Office to Addressee in an envelope addressed to: Assistant Commissioner for Patents, Washington, D.C. 20231.

Robin G. Reeves
Robin G. Reeves

Sir:

7/16/97
Date

Express Mail Label No. **EM031048215US**

RULE 60 DECLARATION

1) Enclosed is a copy of U.S. Patent Application Serial No. 08/367,399, filed on 30 December 1994.

2) I have examined said enclosed copy and have found it to be a true, accurate, and complete copy of said Serial No. 08/367.399, as originally filed, with no additions or deletions therefrom.

3) Amendments, if any, that were cofiled with the previously filed application of paragraph 1) above and referred to in Applicant's Declaration in such application do not constitute new matter.

4) I declare further that all statements made herein on my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the instant application or any patent issuing thereon.

David M. Woods

David M. Woods
Attorney for Applicant
Registration No. 27,171

DMW/rg
Telephone: (716) 477-5256
Facsimile: (716) 477-4646

PATENT APPLICATION BASED ON: Docket Number 69998
I.R. No. IR-94-069998

Inventor(s): Kenneth A. Parulski
Timothy J. Tredwell

Attorney: David M. Woods

Document ID: \DOCKETS\69998\APPL.DOC

**AN ELECTRONIC CAMERA HAVING DUAL MODES FOR COMPOSING
AND CAPTURING STILL IMAGES**

EASTMAN KODAK COMPANY
RESTRICTED INFORMATION

"Express Mail" mailing label number TB33397495XUS
Date of Deposit December 30, 1994

I hereby certify that this paper or fee is being deposited
with the United States Postal Service "Express Mail Post
Office to "Addressee" service under 37 CFR 1.10 on the date
indicated above and is addressed to the Commissioner of
Patents and Trademarks, Washington, D.C. 20231

Robin G. Reeves

(Typed or printed name of
person mailing paper of fee)

Robin A. Reeves

(Signature of person mailing paper or fee)

12/29/94

**AN ELECTRONIC CAMERA HAVING DUAL MODES FOR COMPOSING
AND CAPTURING STILL IMAGES**

FIELD OF THE INVENTION

5

The invention pertains to an electronic still camera for composing and capturing still images, and, more particularly, to an electronic camera having a "motion" mode for previewing a scene and a "still" mode for capturing a particular image in the scene.

BACKGROUND OF THE INVENTION

Consumer camcorders which include the capability of recording analog motion and/or still images on 8mm or VHS videotape have been developed by a number of companies. Motion images are recorded in the same manner as in any standard camcorder. These cameras include a single chip charge coupled device (CCD) sensor having a color filter array that provides a spatially color-sampled image. To record still images, the user pushes a "still capture" button at the desired instant. The image obtained from the CCD sensor is temporarily stored in a digital memory. The image is then read from the memory and recorded onto the videotape. Some camcorders include color liquid crystal displays (LCD), which are also spatially color-sampled devices. Some are relatively large, for example, ranging from approximately 2.5" to 4" in diagonal. Such a display is used, instead of a normal eyepiece viewfinder, to allow the user to properly frame the subject and view the images as they are being recorded. It is also used to view the recorded images as the videotape is played back.

Figure 1A shows a typical color LCD display, in which the liquid crystal material is trapped between an upper glass plate 1 and a lower glass plate 2. The upper plate 1 has a common transparent electrode 3 and

an array 4 of color filters surrounded by a black mask 5. The lower plate 2 includes an array 6 of transparent pixel electrodes juxtaposed underneath the array 4 of color filters. Individual pixel electrodes are activated via thin film transistors (TFT) 7 that are controlled from a video signal on the source lines 8 and a scanning signal on the gate line 9. The LCD display includes the usual polarizer layers (not shown) on the glass plates 1 and 2, such that activation of selected transparent pixel electrodes allows light to pass through the corresponding color filters and reflect to the viewer, thereby creating a color image. A typical LCD display such as the Epson LB 2F-BC00, manufactured by Seiko-Epson Company, Japan, has about 240 lines of pixels and about 300 pixels per line, with an image aspect ratio of 4:3. Such an aspect ratio allows the entire area of the image obtained from the 4:3 aspect ratio NTSC format CCD sensor to be displayed on the LCD screen, so that the LCD screen composition will be the same as the image that is recorded by the camcorder NTSC format recorder, for later display on an NTSC format television display. Note that because the LCD has only 240 lines of pixels, the interlaced NTSC signal is displayed using a "repeat field" technique, where both the odd and even fields from the NTSC format sensor are displayed using the same lines of pixels on the LCD. This LCD, like most commercially available LCDs, has "rectangular" pixels, rather than square pixels, where the distance between pixels in the horizontal direction is for example $\frac{2}{3}$ the distance in the vertical direction. The LCD pixels are overlaid with a diagonal RGB stripe pattern as shown in Figure 1B.

In camcorders, the processing for both the still images and the motion images is identical. Such processing is normally implemented by hardwired analog integrated circuits, although camcorders which use digital image processing integrated circuits have been

produced. Such camcorders convert the signal from the CCD sensor into an NTSC composite or component format signal, which is provided to a video recording subsystem or a video output jack. The color LCD

5 display includes circuitry to decode the NTSC composite or component signal back into spatially subsampled RGB signals to drive the individual RGB pixels on the LCD sensor.

In a system oriented toward still photography, and
10 in particular a digital still system, it would be desirable to avoid the necessity of generating an NTSC format signal in order to reduce the complexity of the required circuitry. In a totally digital system, that is, both the recording and display channels are
15 digital, it is further desirable to minimize incompatibility between the channels. The problem is to achieve these objective in an architecture that minimizes cost and complexity and maximizes user handling.

SUMMARY OF THE INVENTION

This problem is solved according to the invention by a number of features. In one aspect, the
25 electronic camera is operable in a still image mode according to a relatively more complex digital image processing technique to produce high quality still images, and in a motion preview mode according to a relatively more simple digital image processing
30 technique to produce a preview image of acceptable quality prior to initiation of the still image mode. Such an architecture is particularly adapted to mapping an array of color image pixels from a sensor into an array of color display pixels on an LCD display
35 comprising discrete LCD display pixels fewer in number than image sensor pixels. In that case, a relatively simple digital processing technique combines same-colored image pixel signals into a fewer number of

intermediate pixels that correspond to the arrangement of the color display pixels.

The advantage of the invention is that the two modes can be tailored for a relatively low quality "motion" mode and a much higher quality "still" mode.

The motion mode images from the CCD sensor are processed by a hardwired digital signal processing circuit that generates low resolution, spatially subsampled digital image data which can directly drive the relatively low resolution LCD display. This reduces the complexity and clock frequency of the required circuitry, compared to generating an NTSC format signal, as is normally done in the prior art.

The still mode image from the CCD sensor is processed by a general purpose processor (CPU) which executes an image processing software program in order to produce a high quality digital still image.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention will be described in relation to the drawings, whereon

Figures 1A and 1B show the structure and color filter pattern of a known color liquid crystal display (LCD);

Figure 2 is a block diagram of an electronic camera incorporating dual modes for composing and capturing a still image according to the invention;

Figures 3A and 3B are diagrams of progressive scan image sensors useful with the camera of Figure 2;

Figure 4 is a diagram of the Bayer color filter geometry for the sensor used with the camera of Figure 1;

Figure 5 shows the line timing for the still mode of operation;

Figures 6A and 6B show the line timing for the preview mode of operation;

Figure 7 shows the special line skipping pattern used in the preview mode;

Figure 8 shows further detail of the preview mode processing circuit shown in Figure 2;

5 Figures 9A and 9B show further detail of the image statistics processor shown in Figure 2;

Figure 10 shows one example of still mode image processing;

10 Figure 11 shows the effect of pixel mapping from a sensor to an LCD display, each having different aspect ratios; and

Figure 12 shows an enhancement to the block diagram of Figure 2 in which a different sensor clock frequency is used in each of the dual modes.

15

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

20 A block diagram of a camera incorporating dual modes of processing according to the invention is shown in Figure 2. The camera includes an electronic color display, for example, a color liquid crystal (LCD) display 10 of the type shown in Figure 1A, and a user control section 12 having a number of user control
25 buttons, including zoom buttons 14, a preview button 15 and a capture button 16. To take a still picture, the user turns on the camera (using a power switch (not shown), which may be automatically enabled when the user depresses the zoom buttons 14 or the preview
30 button 15, or partially depresses the capture button 16). The user composes the picture by depressing the "zoom in" or "zoom out" buttons 14, and by adjusting the position of the camera, while observing the display image. When the user is satisfied with the composition
35 on the color LCD display 10, the user depresses the capture button 16. The camera then captures a single still image, firing a flash 18 if necessary when the ambient illumination level is low. The still image is

focused upon an image sensor 20 by a motor driven zoom lens 22. The intensity of the image light upon the sensor 20 is regulated by a motor-driven, variable, mechanical aperture 24, while exposure time is regulated electronically by appropriate clocking of the sensor 20. The still image from the image sensor 20 is processed and digitally stored on a removable memory card 26.

Control of the sensor is provided by a timing and control section 27, which is an application specific integrated circuit (ASIC) with processing and timing functions, for both capture and preview operating modes. For instance, the timing and control section 27 includes a sensor timing circuit 28 for controlling the image sensor functions. The sensor timing circuit 28 provides the signals to enable sensor drivers 30, which provide horizontal clocks (H1, H2), vertical clocks (V1, V2), as well as a signal FDG for activating a drain structure on the sensor 20. The output of the image sensor 20 is amplified and processed in an analog gain and sampling (correlated double sampling (CDS)) circuit 32, and converted to digital form in A/D converter stage 34. The A/D output signal is provided to a processor section 35, which includes a digital processor 36 for temporarily storing the still images in a DRAM memory 38. The digital processor 36 then performs image processing on the still images, and finally stores the processed images on the removable memory card 26 via a memory card interface circuit 40, which may use the PCMCIA 2.0 standard interface. An EPROM memory 42 is used to store the firmware which operates the processor 36. The components of the processor 35 are interconnected through a data bus 43, which also connects to the timing and control section 27 and to the card interface 40.

The motor-driven zoom lens 22 includes a zoom motor 44, a focus motor 46, and an aperture motor 48

469420 16056830

(all controlled by lens motor drivers 50). The timing and control section 27 further includes a control interface 52 connected to the lens motor drivers 50 and to a flash control circuit 53 via a photosystem interface block 54, which controls the operation of the zoom lens 22 and the flash 18. The lens zoom position is controlled by the photosystem interface block 54 based on position input from the zoom control buttons 14 through a user status and control section 55. The focusing, exposure control, and white balance is done automatically, as is typically the case in consumer camcorders. This is done by computing "image statistics" in an image statistics processor 60 in the real-time ASIC (timing and control section 27) as preview images are continuously read out of the image sensor 20. The computed values are then used by a program implemented in the digital processor 36, which decides how to adjust the focus motor, aperture, analog gain control, and analog white balance controls via the control interface 52 and the photosystems interface 54 on the ASIC timing and control section 27. Although the digital processor 36 and the control interface 52 are shown as being within two separate sections, in some implementations the same component could be used to perform both of these functions (as well as other of the recited functions). Sensor image data is passed to the processor section 35 through a high speed interface 56 in the timing and control section 27. The sensor image data is also directed to the color LCD display 10 through a preview mode processing circuit 58.

The timing and control section (ASIC) 27 is operable in two modes, a relatively low quality "motion" mode and a much higher quality "still" mode. In the motion mode, images from the sensor 20 are processed by the preview mode processing circuit 58; in the still mode, images from the sensor 20 are processed in the processor 35. The processor 35 is a software-driven digital processing system that is slower than

the ASIC 27. The preview mode processing circuit 58 is a hardwired digital signal processing circuit (part of the ASIC 27) that generates low resolution, spatially subsampled digital image data which can directly drive the relatively low resolution color LCD display 10.

This reduces the complexity and clock frequency of the required circuitry, compared to generating an NTSC format signal, as is normally done in the prior art.

The preview mode processing circuit includes a pixel

remapper 62 for mapping the greater number of image pixels from the sensor 20 into the lesser number of display pixels (i.e., corresponding to the array 6 of transparent pixel electrodes in Figure 1) in the color LCD display 10. The color saturation of the remapped

pixels is then adjusted in a color adjustment circuit 63 and its output is applied to a multiplexer 64. The multiplexer 64 selects image data either from the preview mode processing circuit 58, producing a preview image, or from the high speed interface 56, which

allows for suitably preprocessed viewing of stored images.

In this camera, the image processing used to create the preview mode is done in the timing and control ASIC 27, since the processing must be done rapidly. About 60 images per second are processed in preview mode. However, since the image quality of the displayed image is limited by the resolution and color gamut of the LCD screen of the LCD color display 10, there is no need for elaborate image processing.

Therefore, simple "preview mode" image processing is performed in a fixed digital circuit embedded in the preview mode processing circuit 58 (which is part of the ASIC). The quality requirements for the still mode are much greater, since these images will be downloaded

to a computer, and may be displayed on a high resolution CRT display, or printed on a high quality thermal printer. Therefore, the digital image processing must be more elaborate. By using the

digital processor 36 to implement software procedures stored in the firmware memory 42, complex procedures can be implemented. These procedures can take several seconds to complete, since real-time operation is not required. Use of firmware-stored software allows the still mode image processing to be upgraded without requiring a new ASIC design. In effect, what happens is that a relatively less complex digital image processing technique is used in the motion preview mode, but at a higher data rate, and a relatively more complex digital image processing technique is used in the still mode, but at a slower data rate.

Since the update rate, that is, the number of images that need to be supplied per unit time, is different for the still mode than for the motion mode, it is beneficial to use different clock frequencies for the different modes of operation. For example, as shown in Figure 12, a system oscillator 100 produces a 12 MHz clock frequency for use in the motion mode to obtain more updates/second (e.g., 60 images per second), while a divider 102 divides by two to provide a 6 MHz clock frequency for the still mode. The lower frequency allows more time to accurately position the clamp and sample pulses so as to avoid CCD output signal transitions. This increases noise immunity in the still mode. A multiplexer 104 is enabled by the control interface 52 to determine which clock frequency is applied to the sensor timing circuit 28. Though not specifically shown, the changed timing is also communicated to the A/D stage 34 and other timing and control circuits.

The sensor 20 is a progressive scan interline image sensor having a noninterlaced architecture, as shown in more detail in Figure 3A. The sensor comprises a two-dimensional array of photosites 66, e.g. photodiodes, arranged in rows and columns of image pixels, a plurality of vertical registers 68 adjacent photosite columns for transferring rows of image pixel

charge from the photosites 66 to a horizontal register 70 for readout responsive to clock signals from the sensor drivers 30, and a charge drain (specifically, a fast dump structure 72) interposed between the output of the vertical registers 68 and the horizontal register 70 for eliminating complete rows of image pixels at a time from the image sensor 20. A preferred image sensor is the Kodak model CCD KAI-0400CM image sensor, which has approximately 512 active lines with approximately 768 active pixels per line and an image aspect ratio of 3:2. This sensor is described in a Performance Specification document available from Eastman Kodak Company, Rochester, New York. Each pixel is 9 microns "square", since both the vertical and horizontal distances between the centers of adjacent pixels are 9 microns. The 3:2 image aspect ratio of the CCD sensor, although wider than the 4:3 aspect ratio of the display, is considered to be a preferred aspect ratio for still photography, in that the standard 35mm film format, and standard 4R (4" x 6") prints also have a 3:2 image aspect ratio. The sensor uses a color filter array pattern known as the "Bayer checkerboard" pattern, described in U.S. patent 3,971,065, which is shown in Figure 4. Such a color filter array is characterized by a mosaic pattern in which the filter colors alternate in both line and column directions. In the normal operating mode, all of the image pixels on the sensor are transferred as color image pixels to the horizontal register 70, which delivers a stream of color pixel signals to the analog gain and CDS circuit 32 (see Figure 2). The color pixel signals are subsequently converted to digital pixel signals in the A/D converter 34.

The sensor 20 uses a progressive scan readout method, which allows the entire image to be read out in a single scan. The accumulated or integrated charge for the photodiodes comprising the pixels 66 is transported from the photosites to light protected

vertical (parallel) registers 68 by applying a large positive voltage to the phase-one vertical clock (V1). This reads out every row, or line, into the vertical registers 68. The image pixel charge is then

- 5 transported from the vertical registers 68 to the horizontal register 70 by two-phase clocking of the vertical clocks (V1, V2). Between the vertical and horizontal registers is the fast dump structure 72, which is further described in the Performance
- 10 Specification document for the KAI-0400CM sensor. By setting a suitable positive potential on a fast dump gate line FDG, charge from the row of pixel values currently adjacent to the fast dump structure 72 is transferred from the CCD directly into the sensor
- 15 substrate 74 rather than to the horizontal register 70. This dump, or line clear, is accomplished during the vertical-to-horizontal transfer time. When properly controlled by the sensor timing circuit 28, the fast dump structure 72 allows lines of charge to be
- 20 eliminated.

The timing and control section 27 operates the electronic camera shown in Figure 2 in the two aforementioned modes, including a first "still" mode wherein all rows of image pixel charge corresponding to

25 each line are progressively read out through the horizontal register 70 during a single scan, and a second "motion" mode wherein some of the rows of image pixel charge corresponding to some lines are eliminated through the fast dump structure 72 prior to readout.

- 30 As applied to the embodiment of Figure 2, the first mode corresponds to a high quality still imaging mode while the second mode corresponds to a special "line skipping" mode for driving the color LCD display 10. In the second mode, the timing and control section 27
- 35 controls the fast dump structure 72 to eliminate two or more consecutive lines of image charge from the image sensor 20 for every one or more lines of image charge that are transferred to the horizontal register 70 for

0805094 "07169"

readout, thereby generating a pattern of lines (shown in Figure 7) suitable for driving the LCD display in a "repeat field" mode. An appropriate video signal which displays the entire 3:2 aspect ratio sensor image on the 4:3 aspect ratio LCD, without introducing geometric distortion, is generated by alternately eliminating two or four consecutive lines of image charge for every pair of lines of image charge that are transferred to the horizontal register 70.

5 The sensor timing circuit 28 is controlled by the control interface 52 to provide the clock signals V1, V2, H1, H2, and the gate signal FDG according to the two modes of operation. The timing signals for the first mode are shown in Figure 5; those for the second mode are shown in Figure 6a and 6b. The two-phase cycling of signals V1 and V2 control the transfer of lines of image pixel charge from the vertical registers 68 to the horizontal register 70. The two-phase cycling of signals H1 and H2 control the transfer of a stream of color pixel signals from the horizontal register 70 to subsequent circuits in the camera. The level of the signal FDG determines whether the image charge is dumped to the substrate 74 or transferred to the horizontal register 70. When the sensor 20 is clocked using the first timing mode shown in Figure 5 for all lines of the sensor, all lines of the sensor are clocked out, one after the other, through the horizontal register 70, processed in subsequent camera circuitry, and stored in the removable memory 26. This timing mode provides a high quality progressive scan still image, but may take 1/30 second or longer to read out the still image. Such timing, however, is acceptable for still mode usage, and, as mentioned before, does not require unusually high speed components and, indeed, may benefit from a lower speed clock.

To provide an image to the color LCD display 10, a lower resolution image is suitable, but the

update rate must be sufficient to provide good motion rendition and eliminate display flicker. Moreover, the sensor 20 includes the aforementioned array of color filters arranged in a particular mosaic color pattern (e.g., the checkerboard Bayer pattern of Fig. 3), and the lines of image charge that are transferred to the horizontal register 70 should preserve that particular color pattern in the pattern of lines that are generated for the line-skipping readout. To provide this kind of image, the sensor is read out in the second mode as shown in Figure 7, using the timing shown in Figures 6A and 6B. As shown in Figure 6A, the first two lines (1 and 2) are read out as in the normal mode. These provide a green-red and a blue-green line. The next two lines (3 and 4) are eliminated by turning on the fast dump structure 72 during the time that these lines are transferred past the fast dump structure 72. Next, as shown in Figure 6B, lines 5 and 6 are read out normally, and then lines 7, 8, 9, and 10 are eliminated. Next, the Figure 6A timing is used to read out lines 11 and 12, while eliminating lines 13 and 14, and then the Figure 6B timing is used to read out lines 15 and 16, while eliminating lines 17-20. This process proceeds for the entire image readout period, during which 102 pairs of lines are read out, and 154 pairs of lines are eliminated.

This special "line skipping" readout mode, as shown in Figure 7, allows the sensor 3:2 aspect ratio image to be fully displayed on a 4:3 aspect ratio LCD without "geometric distortion", that is, without stretching the image vertically, and without cropping off the horizontal edges of the image from the image sensor. This allows the LCD to properly show the entire 3:2 aspect ratio image captured by the sensor, so that an image can be properly composed.

As the 512 lines of the CCD imager are read out using the special "line skipping" mode, they are displayed using only 204 out of the approximately 240

LCD lines of pixels. The remaining approximately 36 lines can either be masked behind a bezel, so that they are not visible, or preferably may be used to display status information, such as the time-of-day, image number, or a "push-button menu" for the user buttons. Figure 11 shows a useful application of such conversions. A sensor having a 3:2 aspect ratio is shown mapped into an image area 90 of an LCD display screen 92 having a 4:3 aspect ratio. A proportional remapping leaves a status area 94 available for other purposes, specifically to show text indicating the function of a set of reconfigurable control buttons 96 in the control section 12. The function of the buttons is specified by the user status and control section 55 (Figure 2). This status information graphics data can be supplied by the digital processor to the LCD 10 via high speed interface 56, when the MUX 64 is controlled so as to use the digital data from interface 56, rather than from circuit 58, for supplying data to the final approximately 32 lines of the display 10.

The "line skipping" readout causes some minor vertical sampling artifacts, but these are not noticeable in the small LCD displays. The pixels output for the sensor 20 in line skipping mode continue to have the Bayer-type color filter repeating pattern, so that they can be processed using processing techniques designed for the Bayer pattern.

The processing complexity of the camera of Figure 2 is considerably simplified by directly mapping the RGB sensor pixels 66 to the RGB pixels of the display 10. The easiest way to do this for the image sensor 20 (512 lines x 768 pixels and 3:2 aspect ratio) is to have an LCD display with 512 x 768 pixels and the same aspect ratio and color filter pattern. However, this would be a custom, costly LCD. Instead, LCDs have fewer display pixels than image pixels on the image sensor, normally have a 4:3 image aspect ratio, and use the diagonally striped RGB pattern shown in Figure 1B.

In this discussion, an LCD pixel array of about 240 lines x 312 pixels per line is assumed.

Therefore, the sensor pixels are processed in a "pixel mapping circuit", such as the LCD pixel remapper 62. A block diagram of this circuit is shown in Figure 8. Note that there are $768/2 = 384$ green or red/blue pixels per line on the sensor (see Figure 4). There are about $300/3 = 100$ green, red, or blue pixels per line on the LCD (see Figure 1B). Thus, there are approximately $1/4$ as many LCD pixels per line (per color) as there are sensor pixels per line. Therefore, the basic plan is to combine same-colored image pixels into a fewer number of intermediate, combination pixel signals that are then mapped into the color display pixels. For instance, a simple "pixel mapping" circuit maps four green sensor pixel signals into one green LCD pixel for one line by summing two green sensor values, spaced apart by 4 CCD pixel positions, in the green pixel summer 76 and dividing by two via bit-shift wiring. The necessary delay is provided by the registers 82 clocked at one fourth the pixel rate, further delayed by one pixel clock. It also maps four red sensor pixels into one LCD pixel in the same manner (using the red/blue summer 78), and also stores this value in a 100 pixel FIFO 80. The FIFO 80 compensates for the fact that the sensor has line sequential red and blue pixels, by supplying blue pixels on the red sensor lines, and red pixels on the blue sensor lines. Four pixel delays are provided by the registers 82' clocked at one fourth pixel rate ($CLK/4$). The mapping process is basically, therefore, a process which, in its simplest form, involves averaging of signals to produce a smaller number of output color pixels than input color pixels. (The CFA interpolation algorithm discussed in reference to Figure 10, on the other hand, produces a larger number of "output" color pixels than input color pixels.) Alternate groups of 2 or 4 lines of sensor values are discarded during preview mode by

using the fast dump gate shown in Figure 3A, as described in connection with the "line skipping" mode. This allows the sensor readout time to be decreased by more than 1/2 during the preview mode.

- 5 Another feature of the design is that by removing the NTSC rate driving circuitry from the color LCD display 10, the active matrix LCD can be updated at a slower frequency than is normally used. This reduces the cost and power consumption of the LCD driver
- 10 circuits (not shown). For example, the LCD can be updated at 30 Hz (provided the LCD active matrix display is designed so as not to exhibit noticeable flicker at this update rate), instead of 60 Hz.

- 15 Once the LCD pixel values are calculated, the LCD color adjust circuit 63 increases the color saturation of the image by forming R-G and B-G color difference signals, and adding or subtracting a fraction of these signals in an array 84 of adders and subtractors from the original RGB signals in order to
- 20 increase the color saturation of the displayed image. This circuit performs a similar function as a 3x3 color matrix, but uses less hardware and provides less color accuracy. The color accuracy is not critical for the LCD display, however, due to the limited color
- 25 reproduction quality of such displays. The color reproduction of the still image is much more important, and is done with a more complicated and precise color correction method with the stored firmware in EPROM 42.

- 30 Figures 9A and 9B show the processing in the image statistics processor 60, which computes real-time values for both still and motion image capture, all during the preview mode. These values include 24 R, G, and B averages used to set white balance and exposure, and 6 average high frequency "detail" values used to
- 35 set focus. The 24 RGB averages for white balance are calculated for a group of 4 x 6 rectangular image regions, for each of R, G, and B; a block diagram of the calculation in one color is shown in Figure 9A.

The 6 average "detail" values for focusing are calculated for green pixels only by accumulating the absolute value of the differences between nearby green values; a block diagram of this calculation is shown in Figure 9B. These values are computed for each preview image and downloaded to the processor 36. The processor 36 implements a firmware stored procedure which determines the optimum exposure parameters (exposure time, f/stop, and analog gain), white balance settings, and lens focus setting. For the still mode, the processor 36 also decides, based on the last preview images, whether to fire the flash, and determines the optimum exposure parameters, white balance settings, and lens focus setting for the still mode.

Once the still image is captured, the digital processor 36 implements the stored firmware procedures to process and store the still image. Figure 10 shows a diagram of one possible still image processing method. The CFA interpolation diagram may include the green interpolation method described in U.S. patent application USSN 085,520, filed June 30, 1993, in the name of the same assignee as the present application, and the chrominance interpolation method described in U.S. patent 4,642,678, both of which are incorporated herein by reference. The color matrix, tone correction, and edge enhancement steps may be similar to those described in U.S. patent 5,189,511, also incorporated herein by reference. The image compression method may be the JPEG standard compression technique.

The foregoing description envisions taking a single still picture following the motion preview mode. The camera can also optionally capture "bursts" of high quality still images into the DRAM memory during the "still" mode, which are then processed as shown in Figure 10. Owing to the flash recharge time and other limitations of the "burst" mode, the "burst" mode could

utilize different exposure parameters (exposure time, aperture, analog gain, flash, and digital processing) than either the motion or the single still mode.

The invention has been described with
5 reference to a preferred embodiment. However, it will be appreciated that variations and modifications can be effected by a person of ordinary skill in the art without departing from the scope of the invention. For instance, Figure 3B shows a progressive scan sensor
10 with two readout registers 86 and 88 (which corresponds to the Performance Specification document for the Kodak KAI-031CM image sensor; the preferred embodiment of Figure 3A simply uses but one register). The purpose is to eliminate the FIFO line delay 80 in the LCD pixel
15 remapper 62. The pairs of lines read out by the registers include both a green/red line and a blue/green line. Therefore, by adding an analog multiplexer between the outputs of the two channels and the analog gain and CDS block 32, which is switched at
20 1/2 the sensor horizontal clock rate, it is possible to obtain a GRBG sequence of sensor data values at the output of the A/D stage 34. The LCD pixel remapper 62 can then be designed to map from the CCD sensor color pixel pattern to the required RGBRGB LCD pixel pattern,
25 without using a line delay. Since two CCD lines are read out in parallel, for each LCD line, fewer lines are eliminated via the fast dump gate than for the single-register sensor shown in Figure 3A.

In particular, if the dual register CCD in
30 Figure 3B had 512 x 768 square pixels with a 3:2 aspect ratio, and the LCD had approximately 240 display lines and a 4:3 aspect ratio, the CCD readout would involve fast dumping one pair of lines for every four pairs of lines read out from the CCD sensor. The pixel readout
35 procedure for the horizontal registers can then be varied depending on the mode of operation: both registers are used for the motion imaging mode and one register is used for the still imaging mode.

Furthermore, although the Bayer pattern was described, other mosaic-type filter patterns could be used to advantage, for example, complementary patterns involving cyan, magenta, yellow and green filters. The processing for the LCD pixel remapper 62 and the LCD color adjust circuit 63 would be accordingly modified to account for the different color arrangement.

5

processing for the LCD pixel remapper 62 and the LCD color adjust circuit 63 would be accordingly modified to account for the different color arrangement.

PARTS LIST

- 1 upper plate
2 lower plate
5 3 common transparent electrode
4 array of color filters
5 black mask
6 array of transparent pixel electrodes
7 thin film transistors
10 8 source lines
9 gate line
10 color LCD display
12 control section
14 zoom buttons
15 15 preview button
16 capture button
18 flash
20 progressive scan interline
22 zoom lens
20 24 mechanical aperture
26 memory card
27 timing and control section
28 sensor timing circuit
30 sensor drivers
25 32 analog gain and CDS
34 A/D converter
36 digital image processor
38 DRAM memory
40 card interface
30 42 EPROM memory
44 zoom motor
46 focus motor
48 variable aperture
50 lens motor drivers
35 52 control interface
53 flash control circuit
54 photosystems interface
55 user status and control section

CLAIMS:

1. An electronic camera operable in a still image mode and in a motion preview mode, the
5 improvement wherein
the still image mode uses a relatively more complex digital image processing technique to produce high quality still images, and the motion preview mode uses a relatively more simple digital image processing
10 technique to produce a preview image of acceptable quality prior to initiation of the still image mode.
2. An electronic camera as claimed in claim 1 wherein both modes operate on color images.
3. An electronic camera as claimed in claim
15 2 further including an image sensor having an array of color image pixels and a display having a smaller array of color display pixels, and wherein the image processing technique used during the motion preview mode maps the array of color image pixels into the
20 smaller array of color display pixels.
4. An electronic camera as claimed in claim 3 wherein the image processing technique used during the motion preview mode also modifies the saturation of the color image pixels.
- 25 5. An electronic camera as claimed in claim 3 wherein the display is a liquid crystal display (LCD) comprising discrete LCD display pixels, and the image processing method used during the motion preview mode maps more than one image pixel from the sensor to
30 generate each value for individual LCD display pixels.
6. An electronic camera as claimed in claim 1 wherein the more complex image processing technique implemented in the still image mode is implemented in software, and more simple image processing technique
35 implemented in the motion preview mode is implemented in an application specific integrated circuit.

7. An electronic camera operable in a still image mode and in a motion preview mode, said electronic camera comprising:

5 an image sensor including a two-dimensional array of image pixels covered by a mosaic pattern of color filters, said image sensor providing a stream of color pixel signals at an output thereof suitable for still imaging;

10 an analog-to-digital stage for converting the color pixel signals to digital pixel signals;

a color display comprising a discrete two-dimensional arrangement of color display pixels, said color display having fewer color display pixels than the number of image pixels on the image sensor; and

15 a preview mode processor for mapping the digital image pixel signals into at least a viewable portion of the color display pixels by combining same-colored image pixels into a fewer number of intermediate pixels that correspond to the arrangement of the color display pixels.

20 8. An electronic camera as claimed in claim 7 wherein the mosaic pattern of color filters covering the image sensor is different than the arrangement of color display pixels.

25 9. An electronic camera as claimed in claim 8 wherein said mosaic pattern of color filters is the following pattern

30 R G R G
G B G B
R G R G
G B G B

35 and wherein the preview mode processor combines the digital pixel signals into a fewer number of RGB pixels by averaging two or more of the same-colored image pixels in each line to provide averaged display pixels.

10. An electronic camera as claimed in claim 9 wherein the preview mode processor further modifies

the saturation of the averaged display pixels by adding or subtracting portions of one or more of the other colors to each averaged display pixel.

11. An electronic camera as claimed in claim 5 7 wherein the image sensor and the viewable portion of the color display have the same aspect ratios such that substantially all of the image pixel signals can be mapped into substantially all of the color display pixels.

12. An electronic camera as claimed in claim 10 7 wherein the image sensor and the color display have different aspect ratios such that substantially all of the image pixel signals are mapped into the viewable portion of the color display pixels, leaving another 15 portion of the color display pixels available for non-imaging use.

13. An electronic camera operable in a still image mode and in a motion preview mode, said electronic camera comprising:

20 an image sensor comprising a two-dimensional color filter array, a two-dimensional array of image pixels arranged in rows and columns with respect to the color filter array, and a horizontal register for outputting rows of color pixel signals;

25 an analog-to-digital stage for converting the color pixel signals to digital pixel signals;

a color display comprising a specific two-dimensional color pattern of display pixels arranged in rows and columns, having substantially fewer rows and 30 fewer columns than the image sensor;

a still image processor for processing the digital pixel signals obtained during the still image mode, and

35 a preview mode processor for mapping the digital pixel signals obtained during the motion preview mode into the display pixels according to a procedure that digitally maps the digital pixel signals

030504-01000000

corresponding to the color filter array of the sensor into the color pattern of the color display.

14. An electronic camera as claimed in claim 13 wherein the preview mode processor further modifies the saturation of the digital pixel signals.

15. An electronic camera as claimed in claim 13 wherein the still image processor utilizes a software procedure for processing the digital pixel signals and the preview mode processor includes a fixed digital circuit embedded in an application specific integrated circuit (ASIC) for processing the digital pixel signals.

16. An electronic camera as claimed in claim 15 wherein the ASIC processes the digital pixel signals more rapidly than the software procedure.

17. An electronic camera as claimed in claim 13 wherein the color filter array covering the image sensor is different than the color pattern of display pixels.

18. An electronic camera as claimed in claim 17 wherein said color filter array has the following pattern

R G R G
G B G B
R G R G
G B G B

and wherein the preview mode processor combines the digital pixel signals into a fewer number of RGB pixel signals by averaging two or more of the same-colored image pixel signals in each line to provide averaged RGB pixel signals.

19. An electronic camera operable in a still image mode and in a motion preview mode, said electronic camera comprising:

an image sensor comprising a two-dimensional array of image pixels arranged in rows and columns, and

a horizontal register responsive to clock signals for outputting rows of image pixel signals;

an analog-to-digital converter for converting the output image pixel signals into digital image pixel signals;

a still image processor for processing the digital image pixel signals obtained during the still image mode;

a motion preview processor for processing the digital image pixel signals obtained during the motion preview mode; and

a timing generator for operating the image sensor according to respectively different clock signal frequencies depending upon which operating mode is being used.

20. An electronic camera as claimed in claim 19 wherein the clock frequency for operating the image sensor in the motion preview mode is higher than the clock frequency for operating the image sensor in the still image mode.

21. An electronic camera operable in a still image mode and in a motion image mode, said electronic camera comprising:

an image sensor including a two-dimensional array of image pixels and a horizontal readout section for providing an output stream of image pixel signals;

an analog-to-digital stage for converting the output image pixel signals into digital image pixel signals; and

a timing and control section for driving the image sensor to provide the output stream of image pixel signals according to a pixel readout procedure involving clock signals, said pixel readout procedure being different for the two modes.

22. An electronic camera as claimed in claim 21 wherein the pixel readout procedure comprises separate clock signal rates for the still image mode and the motion image mode.

AN ELECTRONIC CAMERA HAVING DUAL MODES FOR COMPOSING
AND CAPTURING STILL IMAGES

ABSTRACT

5

10


15

20

25

An electronic camera uses a relatively more complex digital image processing technique in a still image mode to produce high quality still images, and a relatively more simple image processing technique in a motion preview mode to produce preview images of acceptable quality prior to initiation of the still image mode. The more complex digital technique is done in software in a general purpose processor section 35, while the more simple digital technique is implemented in a fixed digital circuit in an application specific integrated circuit 27, which also implements timing and control functions. The motion preview mode uses a shorter image readout period than the still mode and further involves mapping image sensor pixels into a fewer number of color display pixels on a color LCD display 10. The mapping further converts color pixel signals from a mosaic array into a different color pattern on the color LCD display 10.

Fig. 2. Camera Block Diagram

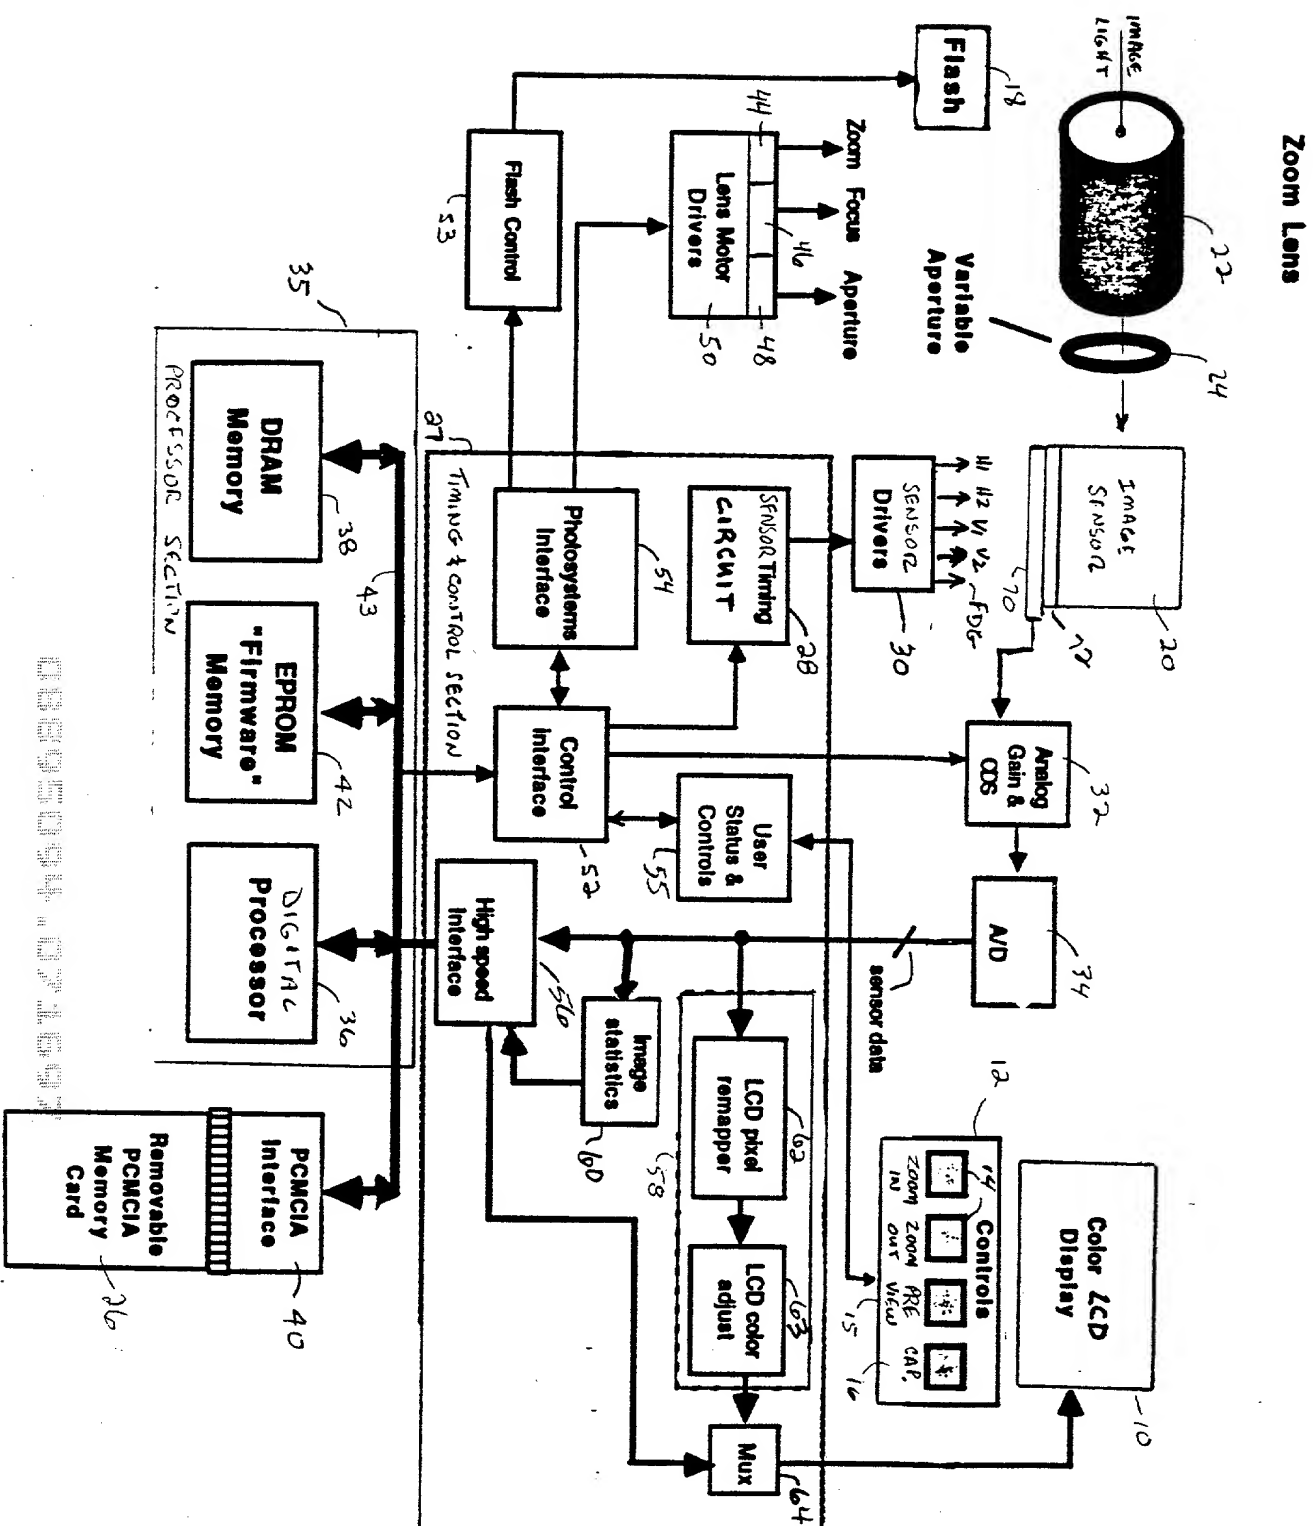

08895054 021697

Fig. 3 A

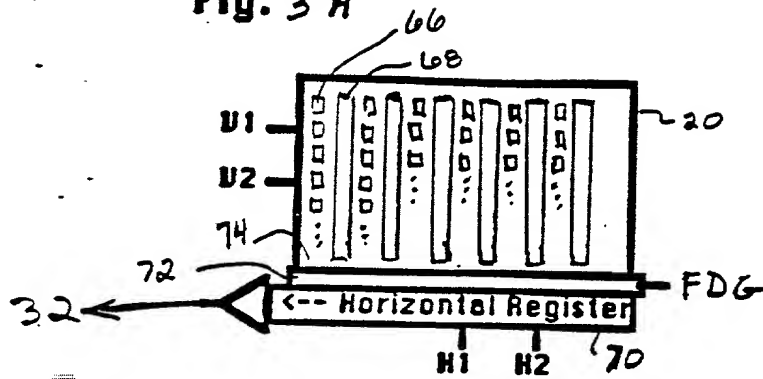


Fig. 3B

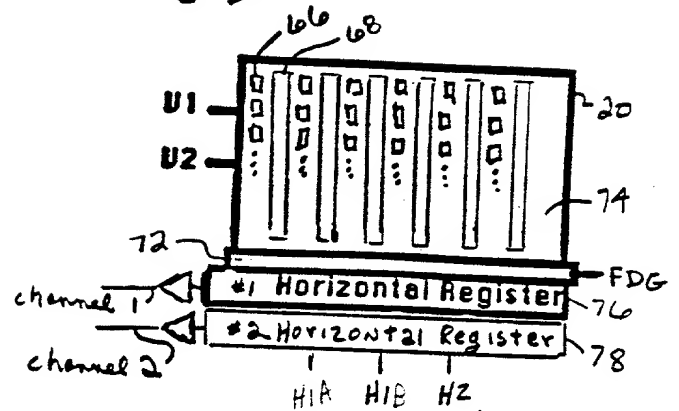



Fig. 4

CCD lines

line 1	G	R	G	R	G	R	G	R
line 2	B	G	B	G	B	G	B	G
line 3	G	R	G	R	G	R	G	R
line 4	B	G	B	G	B	G	B	G
line 5	G	R	G	R	G	R	G	R
line 6	B	G	B	G	B	G	B	G
line 7	G	R	G	R	G	R	G	R
line 8	B	G	B	G	B	G	B	G

FIG 5

Still mode timing diagram

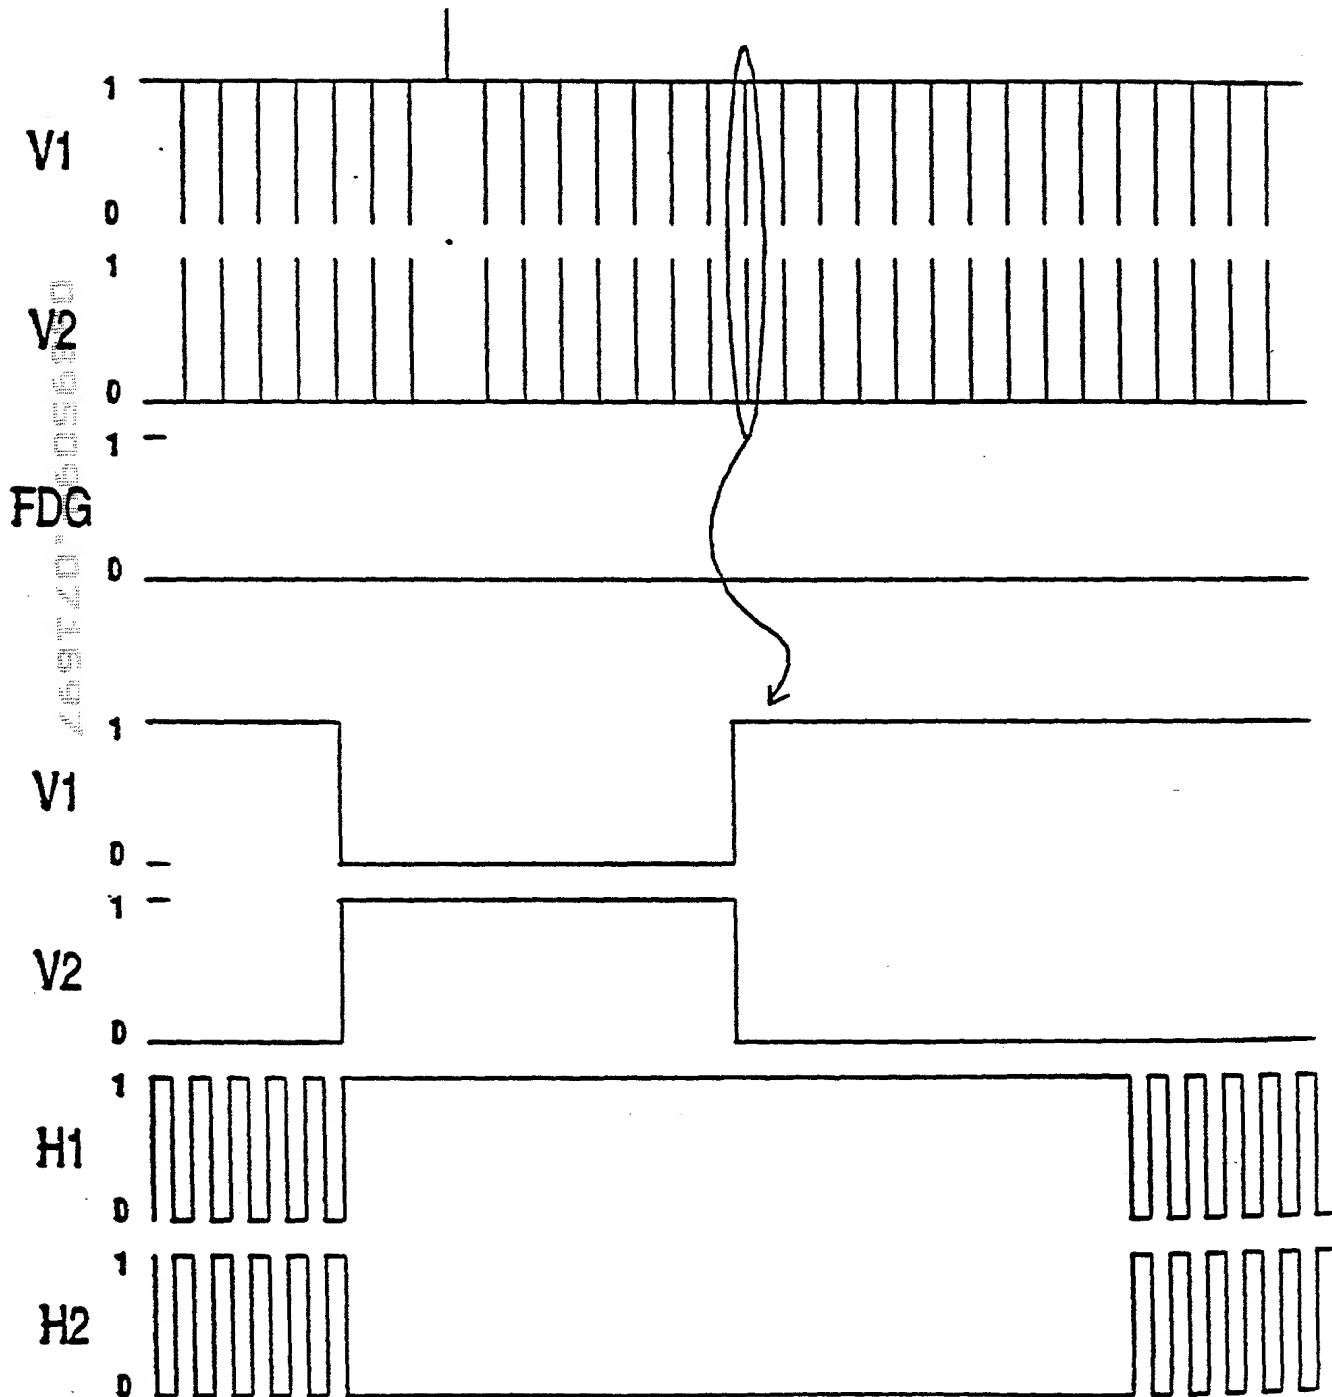

Pseudo-Interlace mode timing diagram

FIG 6a


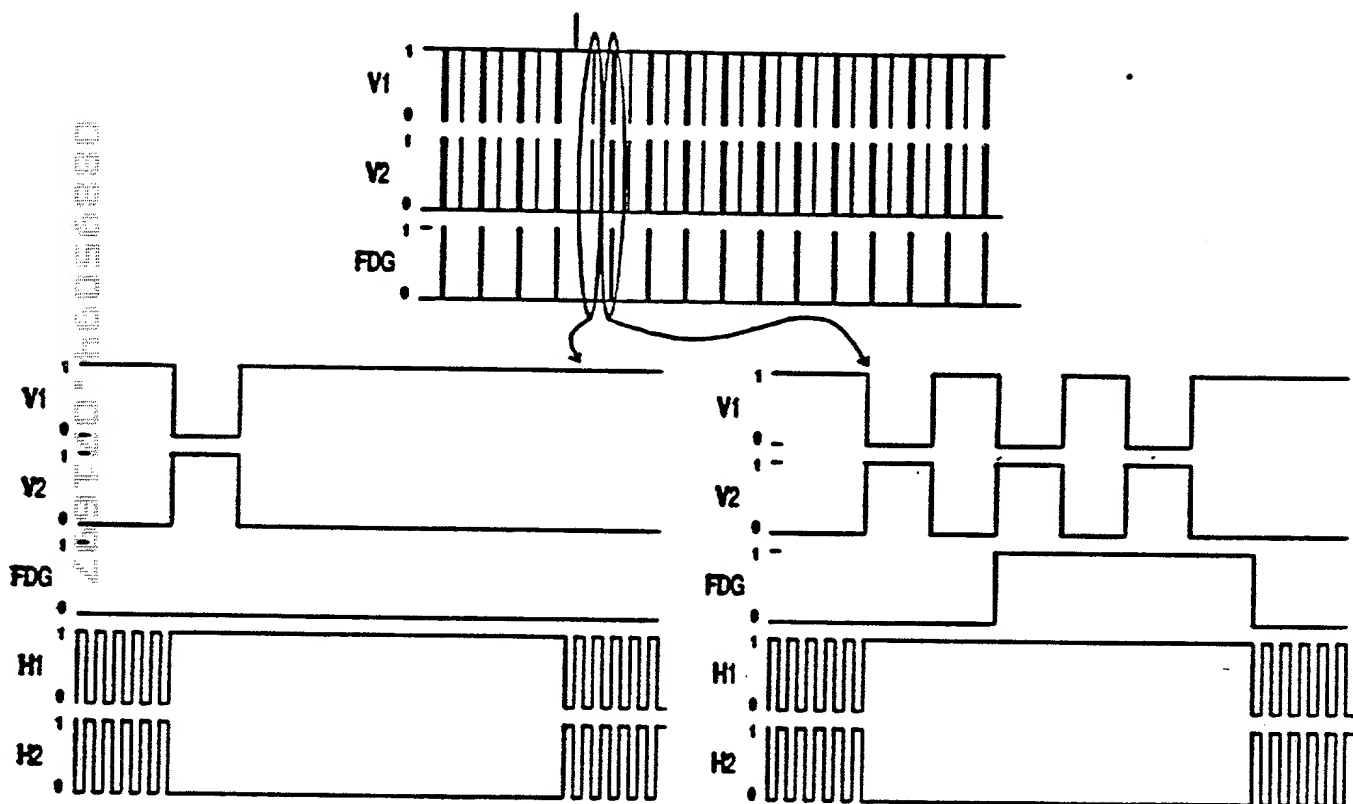


FIG 6b

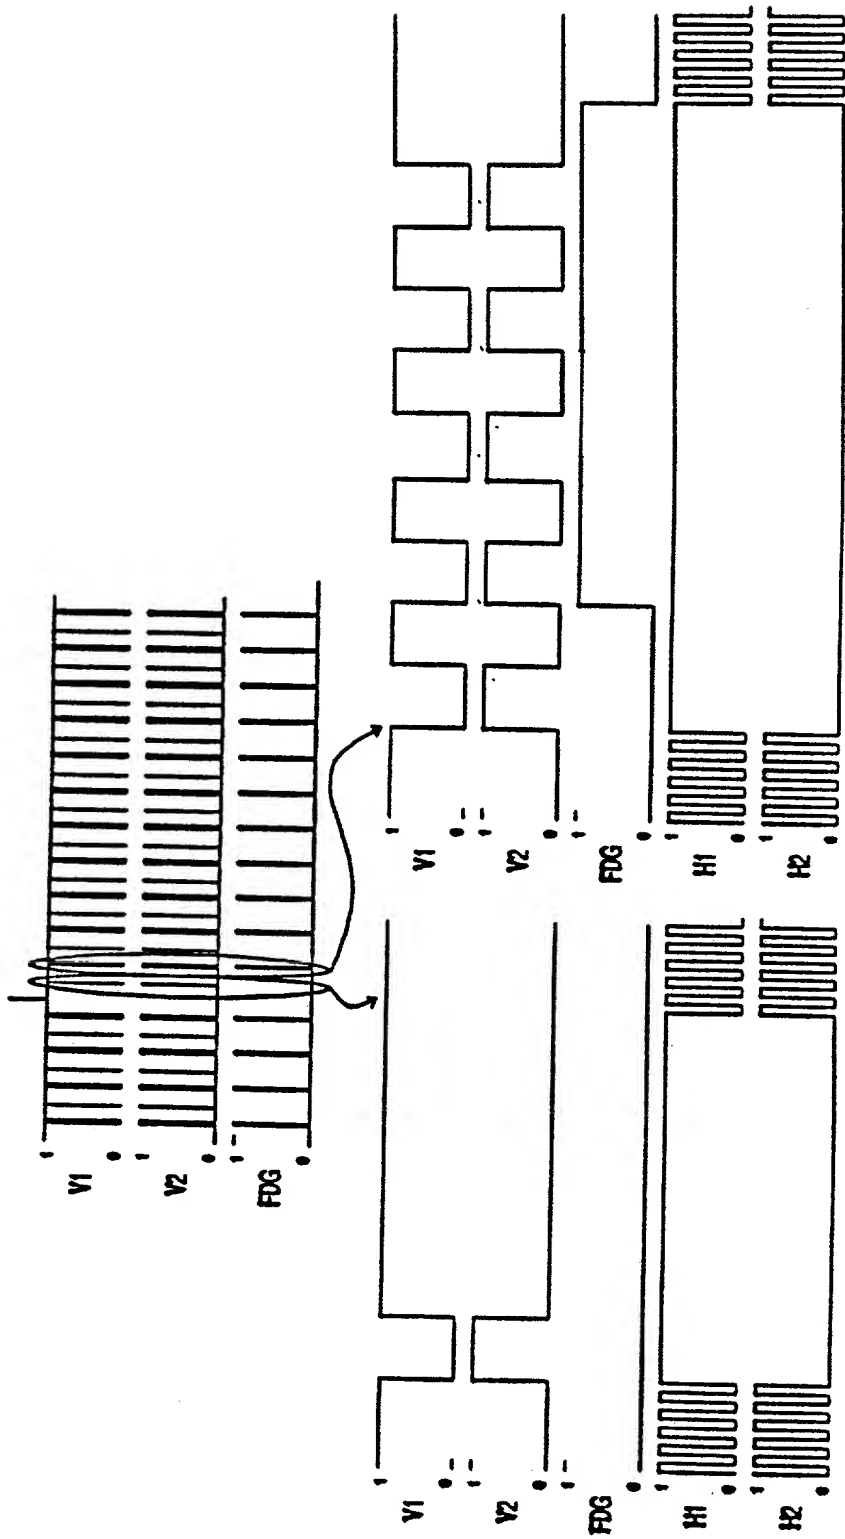

C:\Users\user\AppData\Local\Microsoft\Windows\Temporary Internet Files\Content.IE5\...	
1	10/10/2010 10:10:10 AM
2	10/10/2010 10:10:10 AM
3	10/10/2010 10:10:10 AM
4	10/10/2010 10:10:10 AM
5	10/10/2010 10:10:10 AM
6	10/10/2010 10:10:10 AM
7	10/10/2010 10:10:10 AM
8	10/10/2010 10:10:10 AM
9	10/10/2010 10:10:10 AM
10	10/10/2010 10:10:10 AM
11	10/10/2010 10:10:10 AM
12	10/10/2010 10:10:10 AM
13	10/10/2010 10:10:10 AM
14	10/10/2010 10:10:10 AM
15	10/10/2010 10:10:10 AM
16	10/10/2010 10:10:10 AM
17	10/10/2010 10:10:10 AM
18	10/10/2010 10:10:10 AM
19	10/10/2010 10:10:10 AM
20	10/10/2010 10:10:10 AM
21	10/10/2010 10:10:10 AM
22	10/10/2010 10:10:10 AM
23	10/10/2010 10:10:10 AM
24	10/10/2010 10:10:10 AM
25	10/10/2010 10:10:10 AM
26	10/10/2010 10:10:10 AM
27	10/10/2010 10:10:10 AM
28	10/10/2010 10:10:10 AM
29	10/10/2010 10:10:10 AM
30	10/10/2010 10:10:10 AM
31	10/10/2010 10:10:10 AM
32	10/10/2010 10:10:10 AM
33	10/10/2010 10:10:10 AM
34	10/10/2010 10:10:10 AM
35	10/10/2010 10:10:10 AM
36	10/10/2010 10:10:10 AM
37	10/10/2010 10:10:10 AM
38	10/10/2010 10:10:10 AM
39	10/10/2010 10:10:10 AM
40	10/10/2010 10:10:10 AM
41	10/10/2010 10:10:10 AM
42	10/10/2010 10:10:10 AM
43	10/10/2010 10:10:10 AM
44	10/10/2010 10:10:10 AM
45	10/10/2010 10:10:10 AM
46	10/10/2010 10:10:10 AM
47	10/10/2010 10:10:10 AM
48	10/10/2010 10:10:10 AM
49	10/10/2010 10:10:10 AM
50	10/10/2010 10:10:10 AM
51	10/10/2010 10:10:10 AM
52	10/10/2010 10:10:10 AM
53	10/10/2010 10:10:10 AM
54	10/10/2010 10:10:10 AM
55	10/10/2010 10:10:10 AM
56	10/10/2010 10:10:10 AM
57	10/10/2010 10:10:10 AM
58	10/10/2010 10:10:10 AM
59	10/10/2010 10:10:10 AM
60	10/10/2010 10:10:10 AM
61	10/10/2010 10:10:10 AM
62	10/10/2010 10:10:10 AM
63	10/10/2010 10:10:10 AM
64	10/10/2010 10:10:10 AM
65	10/10/2010 10:10:10 AM
66	10/10/2010 10:10:10 AM
67	10/10/2010 10:10:10 AM
68	10/10/2010 10:10:10 AM
69	10/10/2010 10:10:10 AM
70	10/10/2010 10:10:10 AM
71	10/10/2010 10:10:10 AM
72	10/10/2010 10:10:10 AM
73	10/10/2010 10:10:10 AM
74	10/10/2010 10:10:10 AM
75	10/10/2010 10:10:10 AM
76	10/10/2010 10:10:10 AM
77	10/10/2010 10:10:10 AM
78	10/10/2010 10:10:10 AM
79	10/10/2010 10:10:10 AM
80	10/10/2010 10:10:10 AM
81	10/10/2010 10:10:10 AM
82	10/10/2010 10:10:10 AM
83	10/10/2010 10:10:10 AM
84	10/10/2010 10:10:10 AM
85	10/10/2010 10:10:10 AM
86	10/10/2010 10:10:10 AM
87	10/10/2010 10:10:10 AM
88	10/10/2010 10:10:10 AM
89	10/10/2010 10:10:10 AM
90	10/10/2010 10:10:10 AM
91	10/10/2010 10:10:10 AM
92	10/10/2010 10:10:10 AM
93	10/10/2010 10:10:10 AM
94	10/10/2010 10:10:10 AM
95	10/10/2010 10:10:10 AM
96	10/10/2010 10:10:10 AM
97	10/10/2010 10:10:10 AM
98	10/10/2010 10:10:10 AM
99	10/10/2010 10:10:10 AM

line 1

line 2

line 3

line 4

line 5

line 6

line 7

line 8

line 9

line 10

line 11

line 12

line 13

line 14

line 15

line 16

line 17

line 18

line 19

line 20

**Eliminated
via "fast dump"**

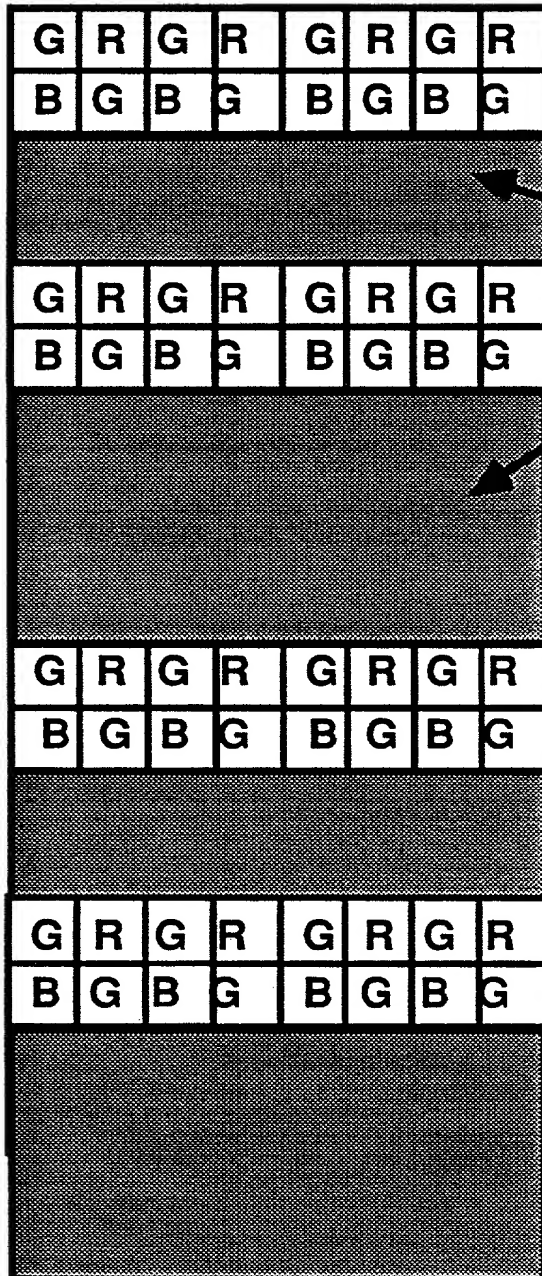


Fig. 8 Preview Mode LCD Processing

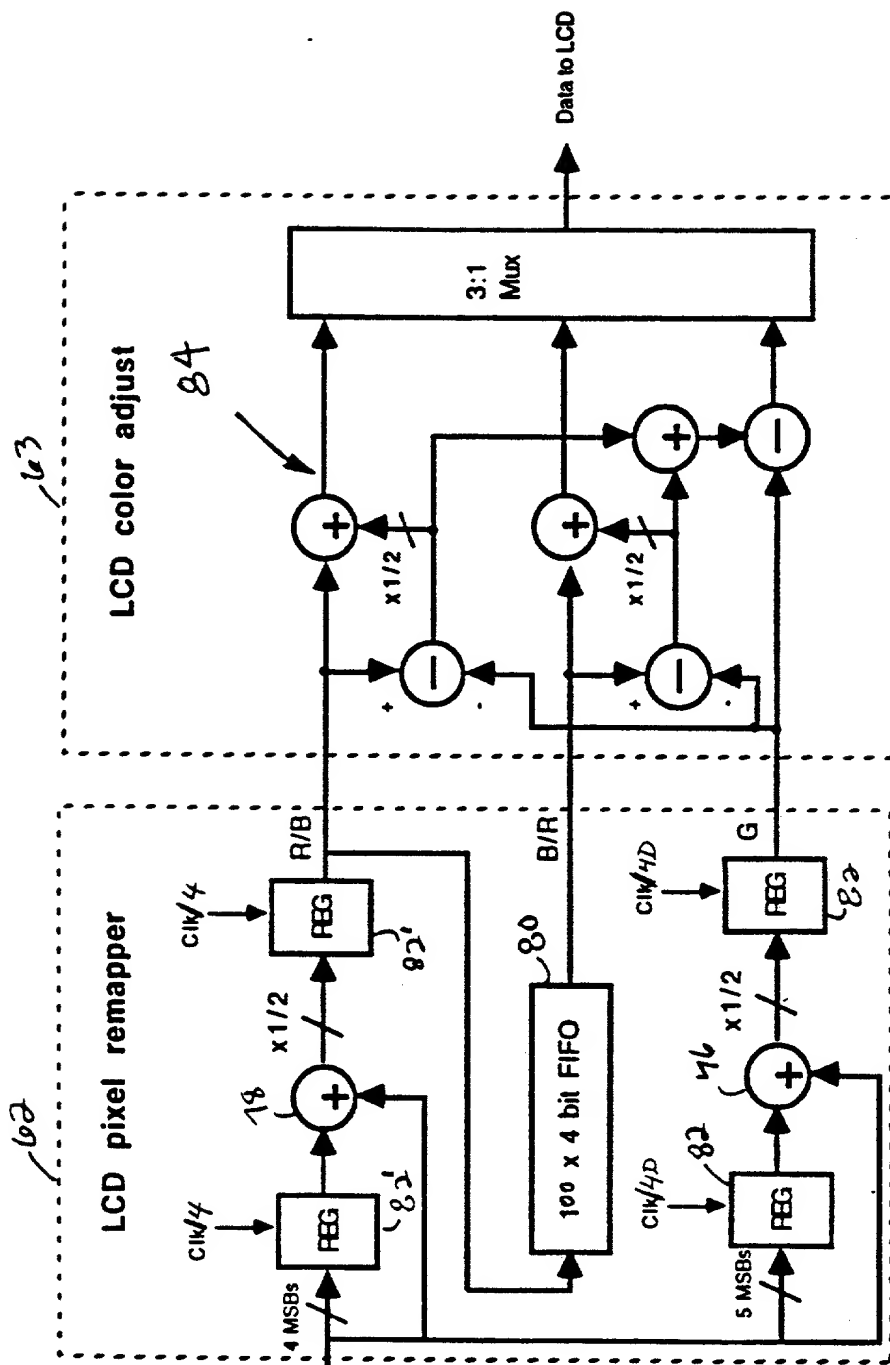


Image exposure / white balance statistics

Calculate average signal level in 4 x 6 matrix of blocks for each of R, G, and B.

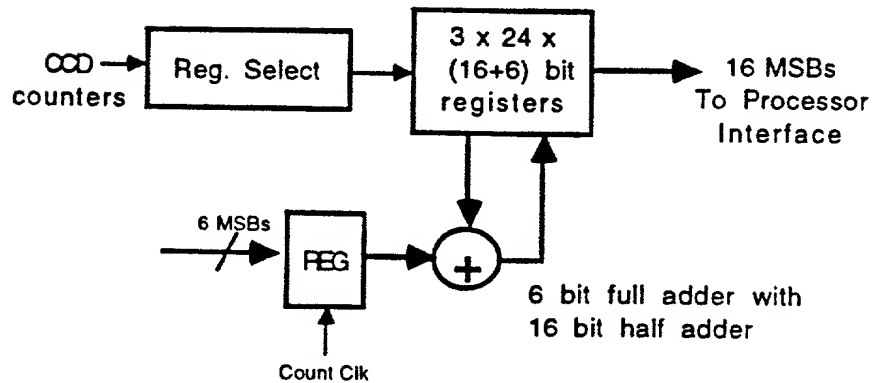


FIG. 9A

Image focus statistics

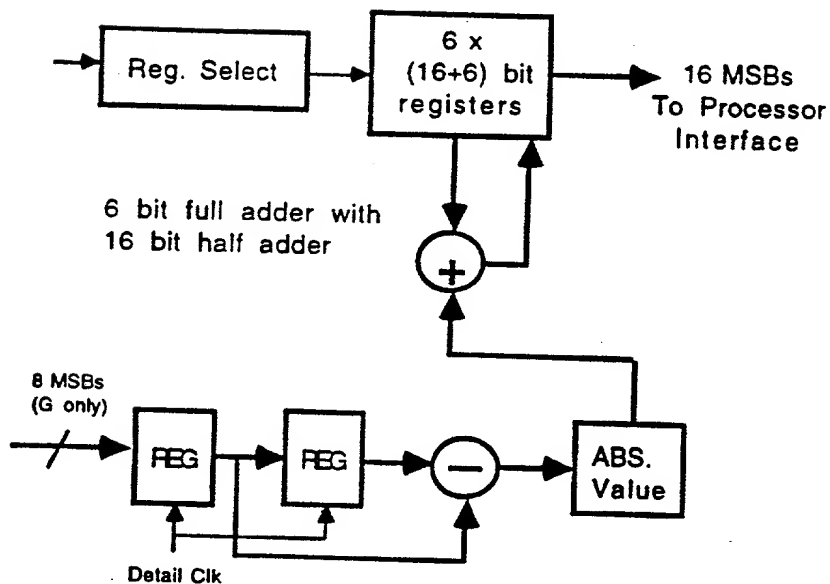
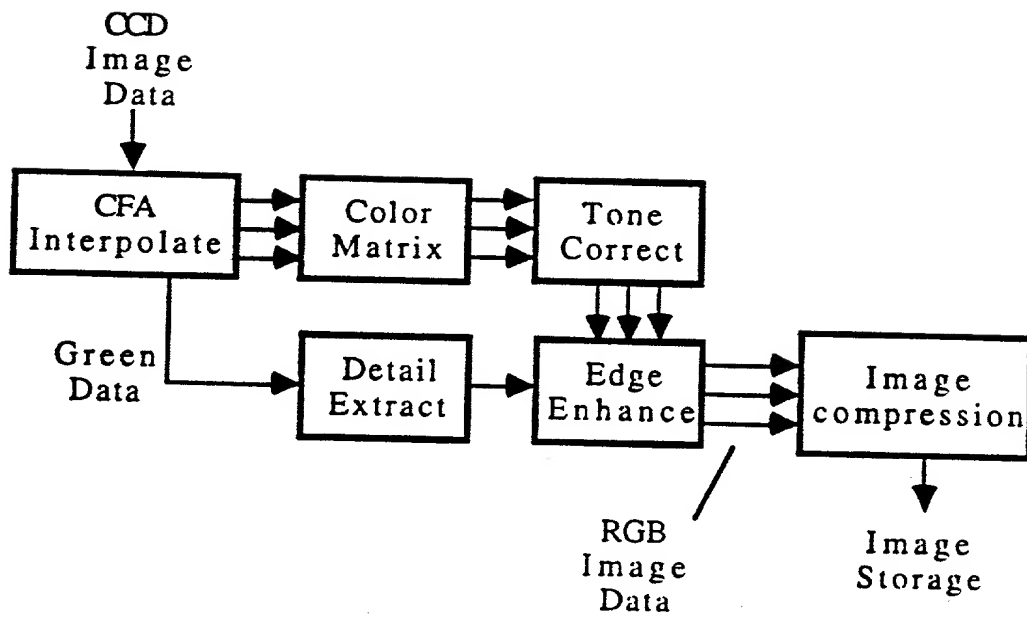


FIG. 9B

Fig. 10 Still Mode Image Processing



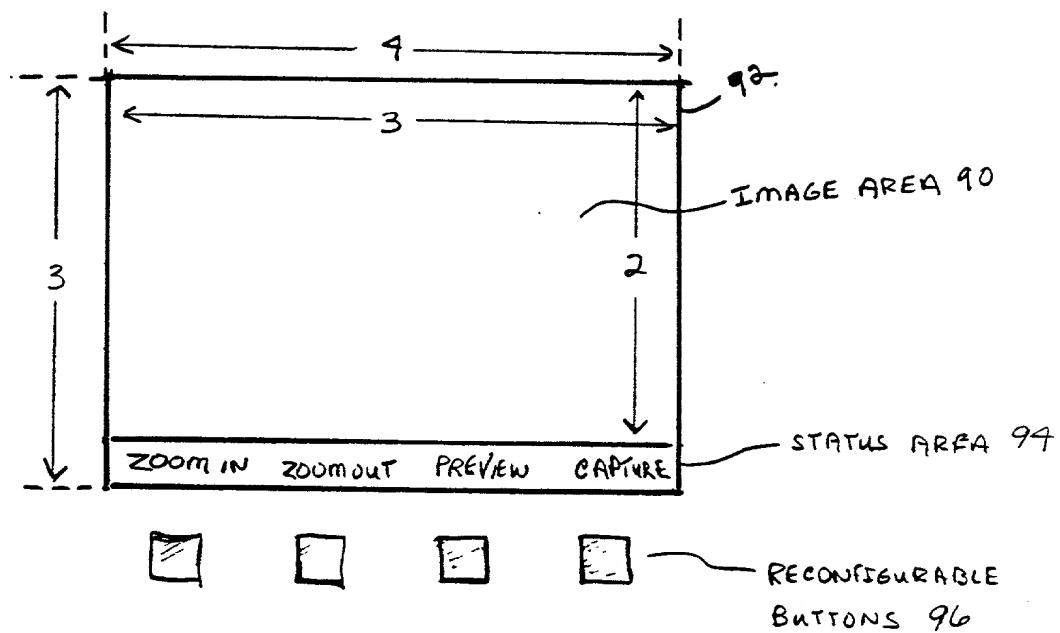


FIG. 11




FIG. 12

